

Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

2/F
2樓

Description 描述	Flat 單位								
	A	B	C	D	E	F	G	H	J
Floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (m) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層石屎地台面之高度距離) (米)	2.800 2.850 3.150	2.800 2.950 3.100 3.150	2.800 2.900 2.950 3.150 3.230	2.850 3.100 3.150 3.230	2.800 2.850 2.950 3.150	2.800 2.950 2.950 3.150		2.800 2.900 2.950 3.150	2.800 2.950 3.150
Thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 厚度 (毫米)	130 150								

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。

- Remarks:
- 1. The dimensions in the floor plans are all structural dimensions in millimetre and rounded off to the nearest integer.
 - 2. Please refer to Page 48 of this sales brochure for legend of the terms and abbreviations shown in the floor plans.

- 備註：
- 1. 樓面平面圖所列數字為以毫米標示之建築結構尺寸，並以四捨五入至整數。
 - 2. 樓面平面圖中顯示之名詞及簡稱之圖例，請參閱本售樓說明書第48頁。

Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

2/F
2樓



Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

3/F, 5/F - 12/F & 15/F - 16/F (4/F, 13/F & 14/F are omitted)
3 樓、5 樓至 12 樓及 15 樓至 16 樓（不設 4 樓、13 樓及 14 樓）

Description 描述	Floor 樓層	Flat 單位								
		A	B	C	D	E	F	G	H	J
Floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (m) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層石屎地台面之高度距離)(米)	3/F, 5/F - 12/F & 15/F 3 樓、5 樓至 12 樓及 15 樓	3.150 3.150 ☆ 3.150 △	3.150 3.150 ◇ 3.150 ◎ 3.150 △	3.150 3.150 ◎ 3.150 ⊕ 3.150 △	3.150 3.150 ◇ 3.150 ☆	3.150 3.150 ◎ 3.150 ☆ 3.150 △	3.150 3.150 ◎ 3.150 △	3.150 3.150 ◎ 3.150 △	3.150 3.150 ◎ 3.150 ⊕ 3.150 △	3.150 3.150 ◎ 3.150 △
Thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板（不包括灰泥）厚度（毫米）		130 150								
Floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (m) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層石屎地台面之高度距離)(米)	16/F 16 樓	2.800 3.100 3.100 ☆ 3.150 3.150 △ 3.500 △	3.150 3.150 ◇ 3.150 ◎ 3.150 △	3.150 3.150 ◎ 3.150 ⊕ 3.150 △	3.150 3.150 ◇ 3.150 ☆	2.800 2.850 3.050 ◎ 3.100 3.150 3.150 ☆ 3.150 △ 3.150 △ 3.200 3.300 ◎ 3.350 ◎ 3.450 ☆ 3.500 △	3.000 ◎ 3.150 3.150 △ 3.350 ◎ 3.500 △	3.000 ◎ 3.100 3.150 3.150 △ 3.300 ◎ 3.350 ◎ 3.500 △	3.000 ◎ 3.100 3.150 3.150 △ 3.300 ◎ 3.350 ◎ 3.500 △	2.700 2.750 3.000 ◎ 3.050 △ 3.100 3.100 △ 3.150 3.350 ◎ 3.500 △
Thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板（不包括灰泥）厚度（毫米）		130 150								

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。

- Remarks:
- The dimensions in the floor plans are all structural dimensions in millimetre and rounded off to the nearest integer.
 - Please refer to Page 48 of this sales brochure for legend of the terms and abbreviations shown in the floor plans.
 - The floor-to-floor height (i.e. the height between the top surface of the structural slab of that floor and the top surface of the structured slab of its immediate upper floor) includes, without limitation:
(◇) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.050m);
(◎) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.200m);
(⊕) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.250m);
(☆) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.300m);
(△) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.350m);
those sunken slabs located partly on the structural slab of that floor or its immediate upper floor.

- 備註：
- 樓面平面圖所列數字為以毫米標示之建築結構尺寸，並以四捨五入至整數。
 - 樓面平面圖中顯示之名詞及簡稱之圖例，請參閱本售樓說明書第 48 頁。
 - 層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）包括但不限於：
(◇) 當中在該樓層跌級樓板為 0.050 米的跌級高度；
(◎) 當中在該樓層跌級樓板為 0.200 米的跌級高度；
(⊕) 當中在該樓層跌級樓板為 0.250 米的跌級高度；
(☆) 當中在該樓層跌級樓板為 0.300 米的跌級高度；
(△) 當中在該樓層跌級樓板為 0.350 米的跌級高度；
該等跌級樓板有部分位於該樓層或上一層之石屎地台面。

Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

3/F, 5/F - 12/F & 15/F - 16/F (4/F, 13/F & 14/F are omitted)
3樓、5樓至12樓及15樓至16樓（不設4樓、13樓及14樓）

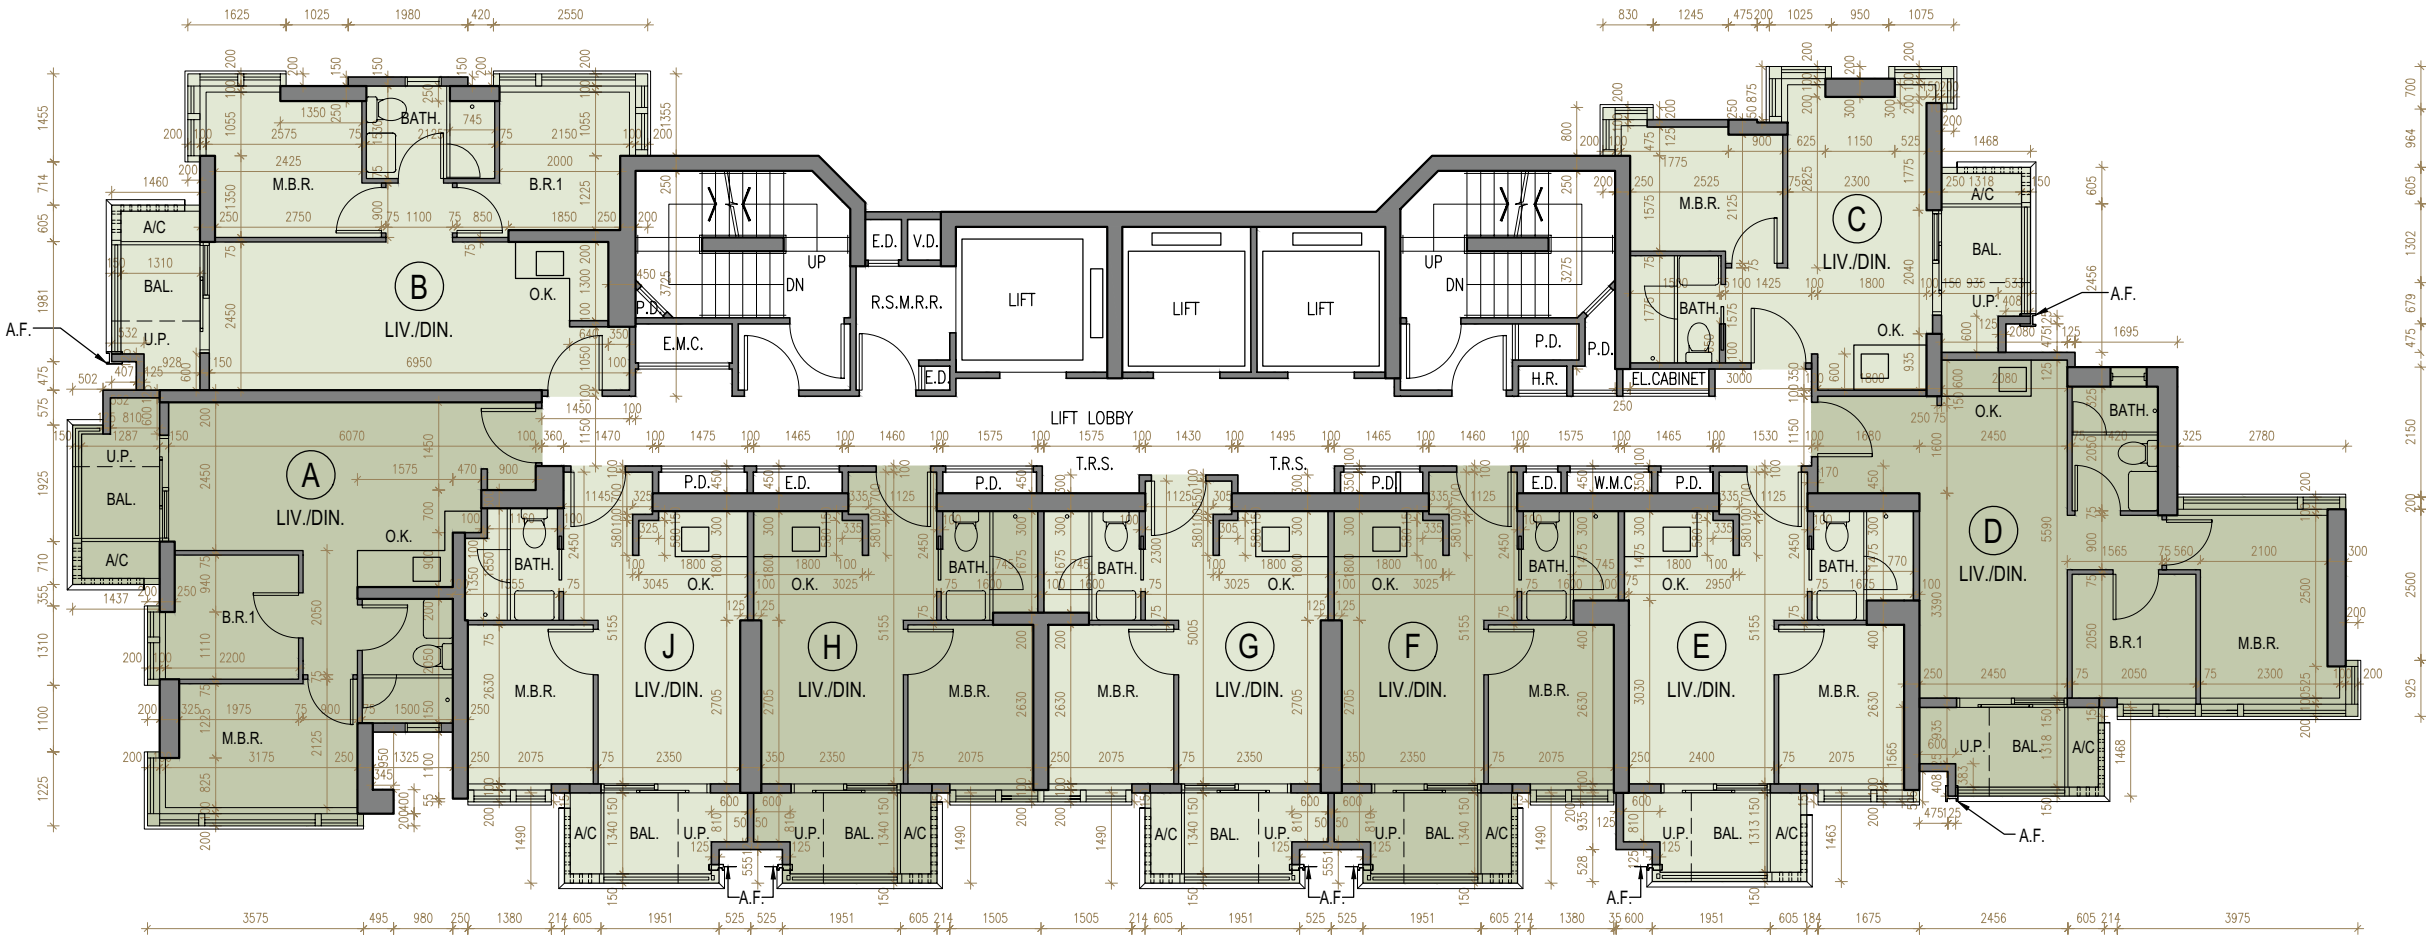

Scale 比例 0 1 2 3 4 5M/米

Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

17/F
17樓

Description 描述	Flat 單位						
	A	B	C	D	E	F	G
Floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (m) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層石屎地台面之高度距離)(米)	2.800 3.150 3.150 ◇ 3.150 △ 3.150 □ 3.150 ▼ 3.170	3.150 3.150 ◇ 3.150 ◎ 3.150 △ 3.170	3.150 3.150 ◎ 3.150 ⊕ 3.150 △ 3.170	3.150 3.150 ◇ 3.150 ☆ 3.170	2.800 2.850 3.150 3.150 ◇ 3.150 ☆ 3.150 △ 3.170	2.800 3.100 3.150 3.150 ◇ 3.150 △ 3.170	2.800 3.100 3.150 3.150 ◇ 3.150 △ 3.170
Thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板(不包括灰泥)厚度(毫米)	130 150						

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。

Remarks:

1. The dimensions in the floor plans are all structural dimensions in millimetre and rounded off to the nearest integer.

2. Please refer to Page 48 of this sales brochure for legend of the terms and abbreviations shown in the floor plans.

3. The floor-to-floor height (i.e. the height between the top surface of the structural slab of that floor and the top surface of the structured slab of its immediate upper floor) includes, without limitation:

(◇) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.050m);

(◎) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.200m);

(⊕) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.250m);

(☆) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.300m);

(△) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.350m);

(□) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.400m);

(▼) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.450m);

those sunken slabs located partly on the structural slab of that floor or its immediate upper floor.

備註：

1. 樓面平面圖所列數字為以毫米標示之建築結構尺寸，並以四捨五入至整數。

2. 樓面平面圖中顯示之名詞及簡稱之圖例，請參閱本售樓說明書第48頁。

3. 層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）包括但不限於：

（◇）當中在該樓層跌級樓板為0.050米的跌級高度；

（◎）當中在該樓層跌級樓板為0.200米的跌級高度；

（⊕）當中在該樓層跌級樓板為0.250米的跌級高度；

（☆）當中在該樓層跌級樓板為0.300米的跌級高度；

（△）當中在該樓層跌級樓板為0.350米的跌級高度；


（□）當中在該樓層跌級樓板為0.400米的跌級高度；

（▼）當中在該樓層跌級樓板為0.450米的跌級高度；

該等跌級樓板有部分位於該樓層或上一層之石屎地台面。

Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

17/F
17樓

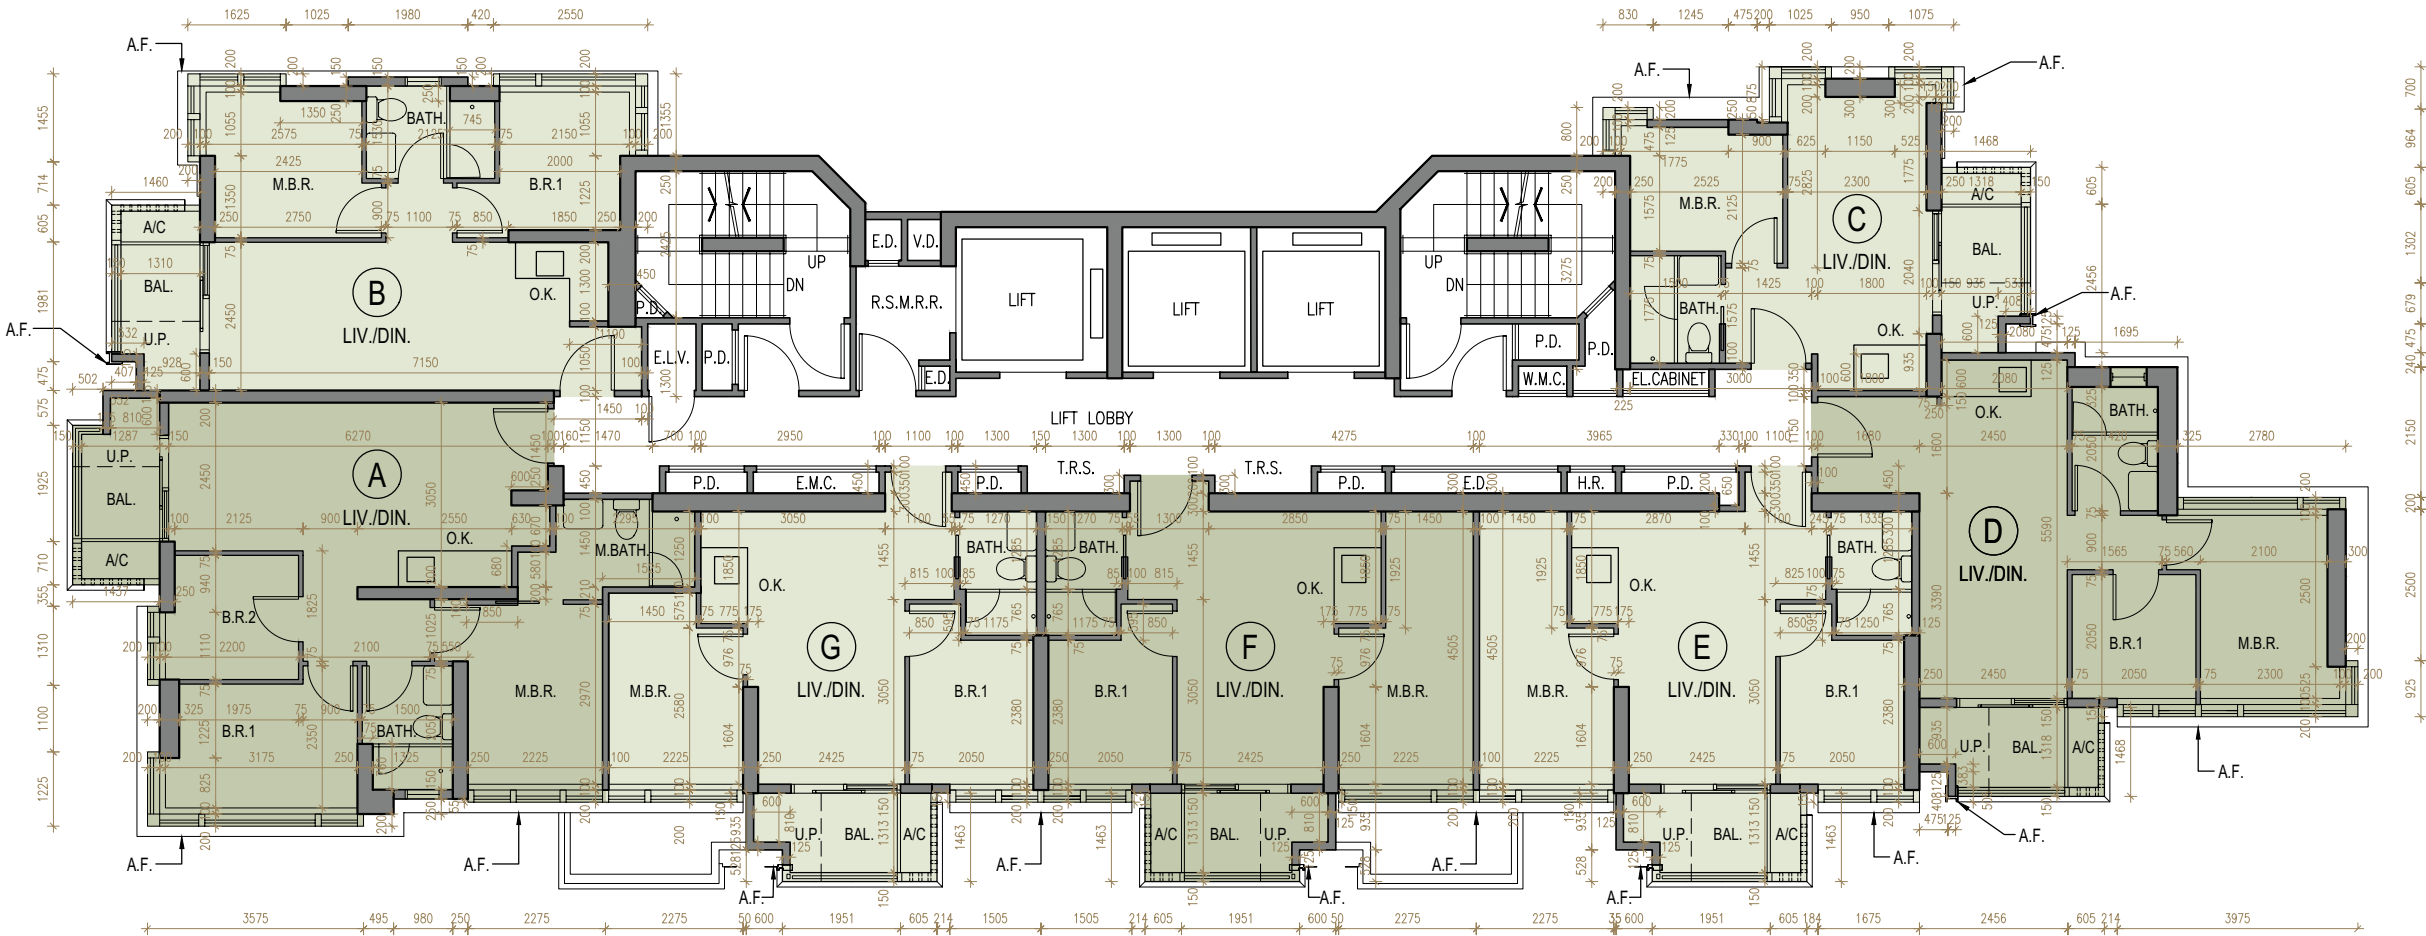

Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

18/F - 23/F
18樓至23樓

Description 描述	Flat 單位						
	A	B	C	D	E	F	G
Floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (m) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層石屎地台面之高度距離) (米)	3.150 3.150 ◇ 3.150 △ 3.150 □ 3.150 ▼	3.150 3.150 ◇ 3.150 ◎ 3.150 △	3.150 3.150 ◎ 3.150 ⊕ 3.150 △	3.150 3.150 ◇ 3.150 ☆	3.150 3.150 ◇ 3.150 ☆ 3.150 △	3.150 3.150 ◇ 3.150 △	3.150 3.150 ◇ 3.150 △
Thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 厚度 (毫米)	130 150						

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。

Remarks:


- The dimensions in the floor plans are all structural dimensions in millimetre and rounded off to the nearest integer.
- Please refer to Page 48 of this sales brochure for legend of the terms and abbreviations shown in the floor plans.
- The floor-to-floor height (i.e. the height between the top surface of the structural slab of that floor and the top surface of the structured slab of its immediate upper floor) includes, without limitation:
(◇) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.050m);
(◎) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.200m);
(⊕) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.250m);
(☆) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.300m);
(△) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.350m);
(□) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.400m);
(▼) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.450m);
those sunken slabs located partly on the structural slab of that floor or its immediate upper floor.

備註：

- 樓面平面圖所列數字為以毫米標示之建築結構尺寸，並以四捨五入至整數。
- 樓面平面圖中顯示之名詞及簡稱之圖例，請參閱本售樓說明書第48頁。
- 層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）包括但不限於：
(◇) 當中在該樓層跌級樓板為0.050米的跌級高度；
(◎) 當中在該樓層跌級樓板為0.200米的跌級高度；
(⊕) 當中在該樓層跌級樓板為0.250米的跌級高度；
(☆) 當中在該樓層跌級樓板為0.300米的跌級高度；
(△) 當中在該樓層跌級樓板為0.350米的跌級高度；
(□) 當中在該樓層跌級樓板為0.400米的跌級高度；
(▼) 當中在該樓層跌級樓板為0.450米的跌級高度；
該等跌級樓板有部分位於該樓層或上一層之石屎地台面。

Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

18/F - 23/F
18樓至23樓

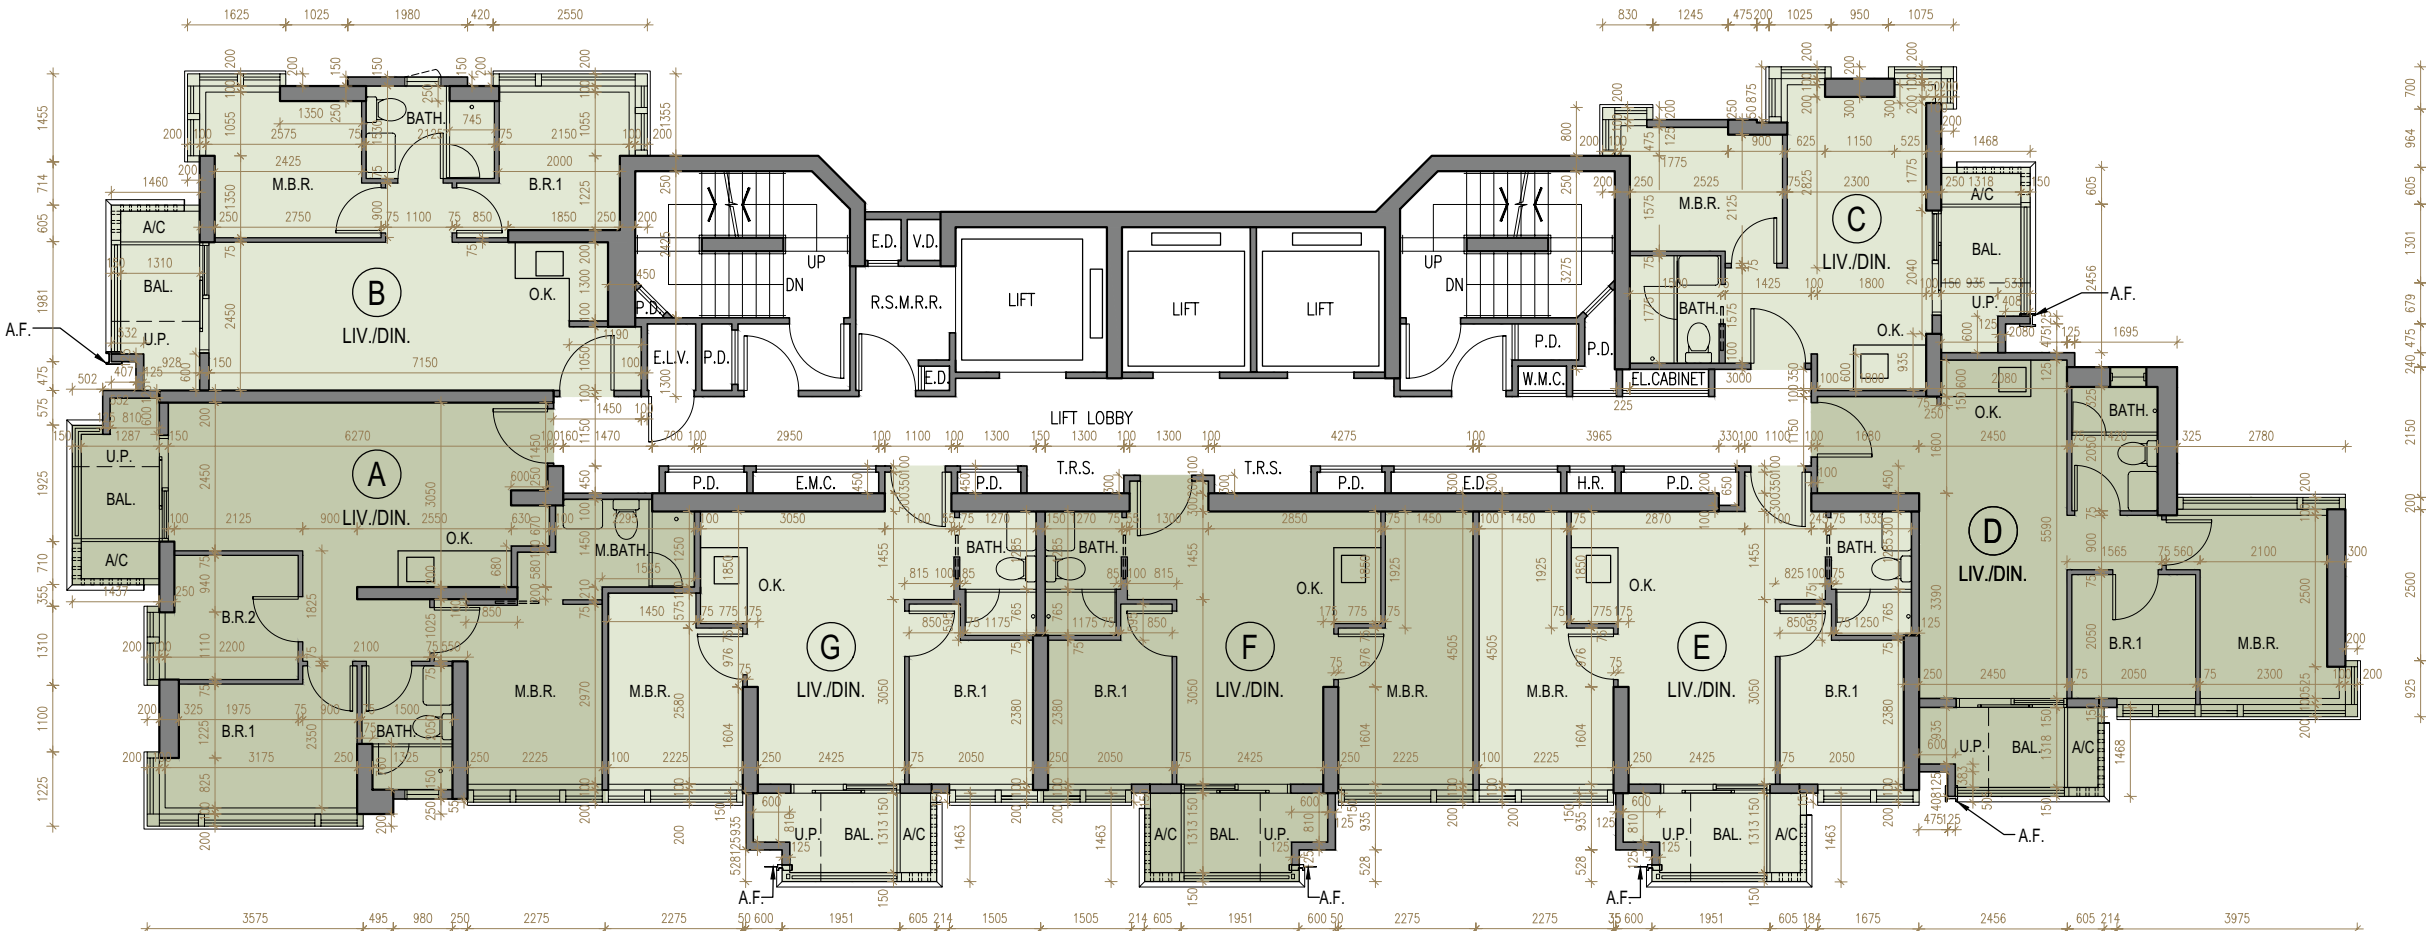

Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

25/F
25樓

Description 描述	Flat 單位						
	A	B	C	D	E	F	G
Floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (m) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層石屎地台面之高度距離) (米)	2.700 2.750 2.800 2.950 3.100 3.100 △ 3.150 3.150 ◇ 3.150 ◇ 3.200 ◇ 3.200 □ 3.250 ▼ 3.500 △ 3.500 □ 3.550 □ 3.600 ▼	3.150 3.200 ◇ 3.350 ◎ 3.500 △	2.800 3.000 ◎ 3.150 3.150 △ 3.350 ◎ 3.400 ⊕ 3.500 △	3.150 3.150 ◇ 3.200 ◇ 3.400 ☆ 3.450 ☆	2.750 2.800 3.050 ☆ 3.100 3.150 3.200 ◇ 3.450 ☆ 3.500 △	2.800 2.850 ◇ 3.100 3.150 3.150 ◇ 3.150 △ 3.200 ◇ 3.500 △	2.800 2.900 2.950 ◇ 3.150 3.150 △ 3.200 ◇ 3.250 △
Thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 厚度 (毫米)	130 150						

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。

Remarks:

1. The dimensions in the floor plans are all structural dimensions in millimetre and rounded off to the nearest integer.

2. Please refer to Page 48 of this sales brochure for legend of the terms and abbreviations shown in the floor plans.

3. The floor-to-floor height (i.e. the height between the top surface of the structural slab of that floor and the top surface of the structured slab of its immediate upper floor) includes, without limitation:

(◇) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.050m);

(◎) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.200m);

(⊕) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.250m);

(☆) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.300m);

(△) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.350m);

(□) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.400m);

(▼) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.450m);

those sunken slabs located partly on the structural slab of that floor or its immediate upper floor.

備註：

1. 樓面平面圖所列數字為以毫米標示之建築結構尺寸，並以四捨五入至整數。

2. 樓面平面圖中顯示之名詞及簡稱之圖例，請參閱本售樓說明書第48頁。

3. 層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）包括但不限於：

(◇) 當中在該樓層跌級樓板為0.050米的跌級高度；

(◎) 當中在該樓層跌級樓板為0.200米的跌級高度；

(⊕) 當中在該樓層跌級樓板為0.250米的跌級高度；

(☆) 當中在該樓層跌級樓板為0.300米的跌級高度；

(△) 當中在該樓層跌級樓板為0.350米的跌級高度；


(□) 當中在該樓層跌級樓板為0.400米的跌級高度；

(▼) 當中在該樓層跌級樓板為0.450米的跌級高度；

該等跌級樓板有部分位於該樓層或上一層之石屎地台面。

Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

25/F
25樓

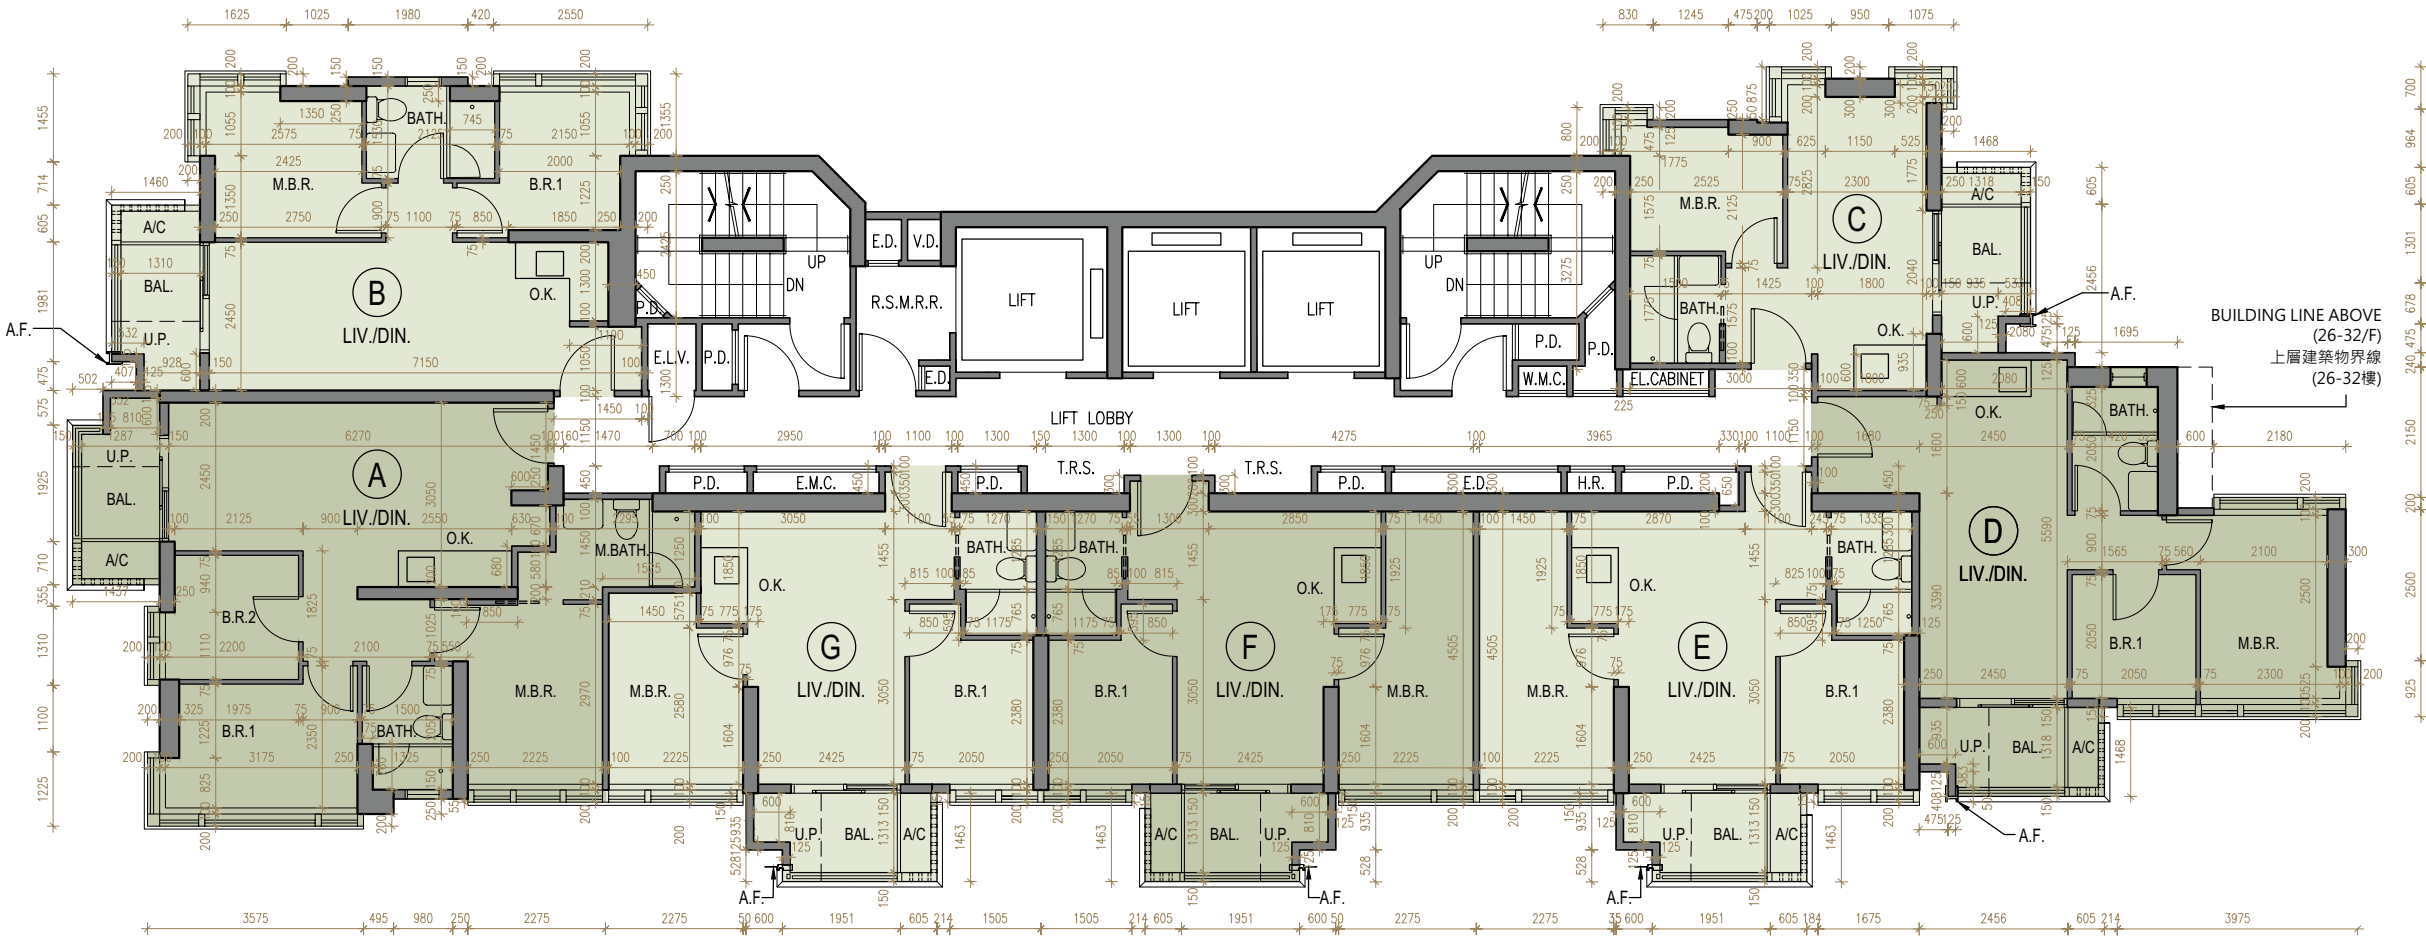

Scale 比例 0 1 2 3 4 5M/米

Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

26/F
26樓

Description 描述	Flat 單位				
	A	B	C	D	E
Floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (m) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層石屎地台面之高度距離)(米)	2.800 2.900 3.125 ◇ 3.150 3.150 ⊕ 3.150 △ 3.500 △	2.800 2.900 2.950 3.000 ◎ 3.075 3.150 3.150 ⊕ 3.200 □ 3.350 ◎ 3.475 □ 3.525 ▼ 3.600 ▼	2.800 2.850 2.900 ◇ 2.950 3.125 ◇ 3.150 3.150 △ 3.200 □ 3.425 △ 3.475 □ 3.500 △ 3.550 □	2.800 2.850 ◇ 3.075 3.150 3.150 △ 3.200 ◇	3.125 ◇ 3.150 3.150 △ 3.500 △
Thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板(不包括灰泥)厚度(毫米)	130 150				

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。

Remarks:


- The dimensions in the floor plans are all structural dimensions in millimetre and rounded off to the nearest integer.
- Please refer to Page 48 of this sales brochure for legend of the terms and abbreviations shown in the floor plans.
- The floor-to-floor height (i.e. the height between the top surface of the structural slab of that floor and the top surface of the structured slab of its immediate upper floor) includes, without limitation:
(◇) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.050m);
(◎) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.200m);
(⊕) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.250m);
(△) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.350m);
(□) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.400m);
(▼) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.450m);
those sunken slabs located partly on the structural slab of that floor or its immediate upper floor.

備註：

- 樓面平面圖所列數字為以毫米標示之建築結構尺寸，並以四捨五入至整數。
- 樓面平面圖中顯示之名詞及簡稱之圖例，請參閱本售樓說明書第48頁。
- 層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）包括但不限於：
(◇) 當中在該樓層跌級樓板為0.050米的跌級高度；
(◎) 當中在該樓層跌級樓板為0.200米的跌級高度；
(⊕) 當中在該樓層跌級樓板為0.250米的跌級高度；
(△) 當中在該樓層跌級樓板為0.350米的跌級高度；
(□) 當中在該樓層跌級樓板為0.400米的跌級高度；
(▼) 當中在該樓層跌級樓板為0.450米的跌級高度；
該等跌級樓板有部分位於該樓層或上一層之石屎地台面。

Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

26/F
26樓

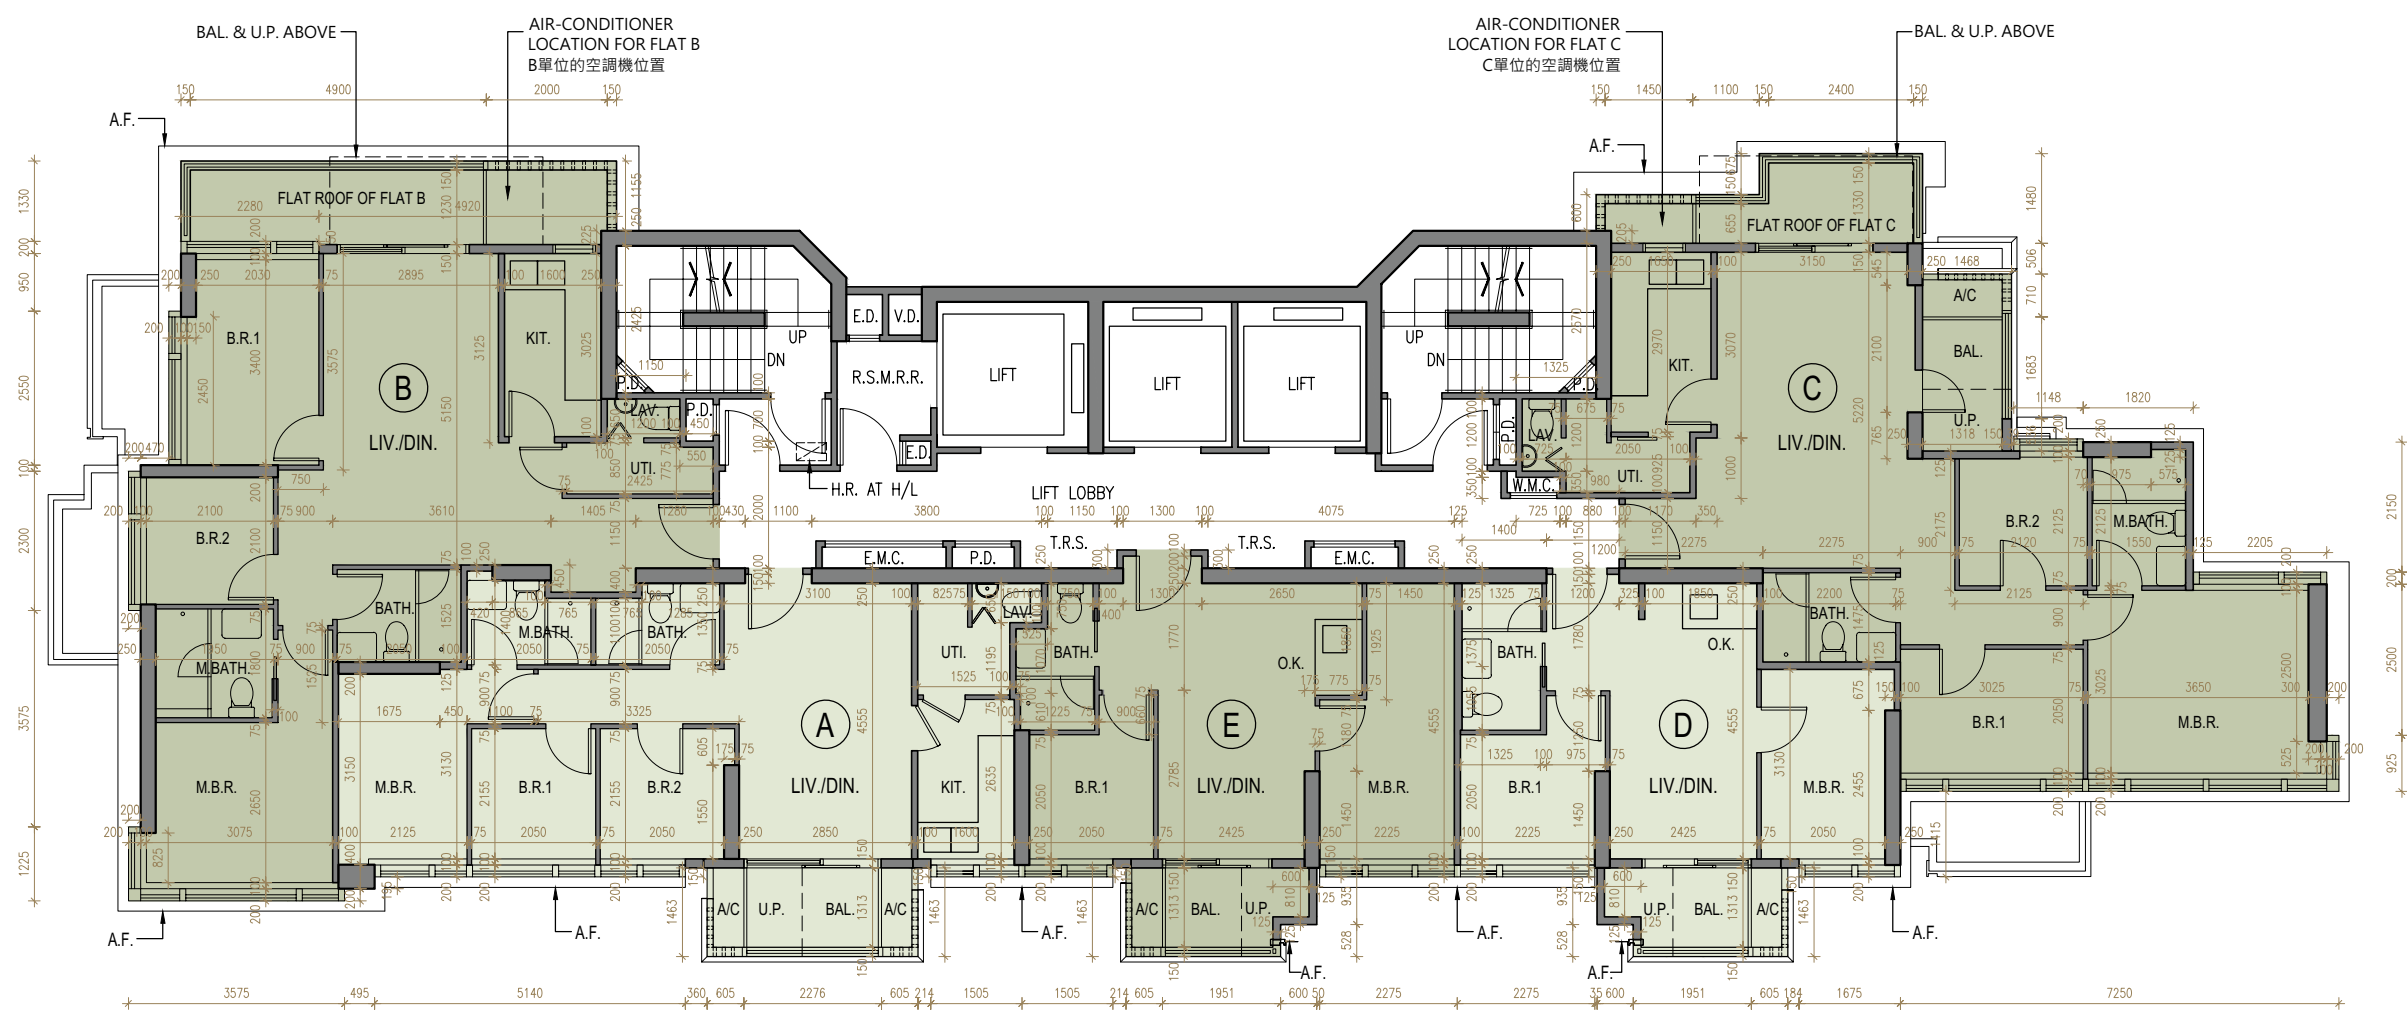

Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

27/F
27樓

Description 描述	Flat 單位				
	A	B	C	D	E
Floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (m) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層石屎地台面之高度距離) (米)	3.150 3.150 # 3.150 ⊕ 3.150 △	3.150 3.150 # 3.150 ⊕ 3.150 △	3.150 3.150 # 3.150 ☆ 3.150 △	3.150 3.150 # 3.150 △	3.150 3.150 # 3.150 △
Thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 厚度 (毫米)	130 150				

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。

Remarks:

1. The dimensions in the floor plans are all structural dimensions in millimetre and rounded off to the nearest integer.

2. Please refer to Page 48 of this sales brochure for legend of the terms and abbreviations shown in the floor plans.

3. The floor-to-floor height (i.e. the height between the top surface of the structural slab of that floor and the top surface of the structured slab of its immediate upper floor) includes, without limitation:

(#) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.075m);

(⊕) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.250m);

(☆) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.300m);

(△) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.350m);

those sunken slabs located partly on the structural slab of that floor or its immediate upper floor.

備註：

1. 樓面平面圖所列數字為以毫米標示之建築結構尺寸，並以四捨五入至整數。

2. 樓面平面圖中顯示之名詞及簡稱之圖例，請參閱本售樓說明書第48頁。

3. 層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）包括但不限於：

（#）當中在該樓層跌級樓板為0.075米的跌級高度；

（⊕）當中在該樓層跌級樓板為0.250米的跌級高度；

（☆）當中在該樓層跌級樓板為0.300米的跌級高度；

（△）當中在該樓層跌級樓板為0.350米的跌級高度；

該等跌級樓板有部分位於該樓層或上一層之石屎地台面。

Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

27/F
27樓



Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

28/F - 29/F
28樓至29樓

Description 描述	Floor 樓層	Flat 單位				
		A	B	C	D	E
Floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (m) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層石屎地台面之高度距離)(米)	28/F 28樓	3.150 3.150 # 3.150 ⊕ 3.150 △	3.150 3.150 # 3.150 ⊕ 3.150 △	3.150 3.150 # 3.150 ☆ 3.150 △	3.150 3.150 # 3.150 △	3.150 3.150 # 3.150 △
Thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板(不包括灰泥)厚度(毫米)		130 150				
Floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (m) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層石屎地台面之高度距離)(米)	29/F 29樓	3.150 3.150 # 3.150 ⊕ 3.150 △ 3.400 ⊕	3.150 3.150 # 3.150 ⊕ 3.150 △	3.150 3.150 # 3.150 ☆ 3.150 △ 3.500 △	3.150 3.150 # 3.150 △	3.150 3.150 # 3.150 △
Thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板(不包括灰泥)厚度(毫米)		130 150				

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。

Remarks:

1. The dimensions in the floor plans are all structural dimensions in millimetre and rounded off to the nearest integer.

2. Please refer to Page 48 of this sales brochure for legend of the terms and abbreviations shown in the floor plans.

3. The floor-to-floor height (i.e. the height between the top surface of the structural slab of that floor and the top surface of the structured slab of its immediate upper floor) includes, without limitation:

(#) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.075m);

(⊕) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.250m);

(☆) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.300m);

(△) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.350m);

those sunken slabs located partly on the structural slab of that floor or its immediate upper floor.

備註：

1. 樓面平面圖所列數字為以毫米標示之建築結構尺寸，並以四捨五入至整數。

2. 樓面平面圖中顯示之名詞及簡稱之圖例，請參閱本售樓說明書第48頁。

3. 層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）包括但不限於：

（ # ）當中在該樓層跌級樓板為0.075米的跌級高度；

（ ⊕ ）當中在該樓層跌級樓板為0.250米的跌級高度；

（ ☆ ）當中在該樓層跌級樓板為0.300米的跌級高度；

（ △ ）當中在該樓層跌級樓板為0.350米的跌級高度；

該等跌級樓板有部分位於該樓層或上一層之石屎地台面。

Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

28/F - 29/F
28樓至29樓



Scale 比例 0 1 2 3 4 5M/米

Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

30/F
30樓

Description 描述	Flat 單位				
	A	B	C	D	E
Floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (m) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層石屎地台面之高度距離) (米)	3.100 3.200 3.450 # 3.525 # 3.700 ⊕ 3.800 △	3.050 3.100 3.350 ⊕ 3.375 3.450 3.450 △ 3.525 # 3.700 ⊕ 3.800 △	3.050 3.100 3.175 # 3.200 3.400 ☆ 3.400 △ 3.450 3.450 # 3.525 # 3.550 # 3.800 △	3.200 3.450 3.525 # 3.800 △	3.450 3.525 # 3.800 △
Thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 厚度 (毫米)	130 150				

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。

Remarks:

1. The dimensions in the floor plans are all structural dimensions in millimetre and rounded off to the nearest integer.

2. Please refer to Page 48 of this sales brochure for legend of the terms and abbreviations shown in the floor plans.

3. The floor-to-floor height (i.e. the height between the top surface of the structural slab of that floor and the top surface of the structured slab of its immediate upper floor) includes, without limitation:

(#) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.075m);

(⊕) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.250m);

(☆) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.300m);

(△) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.350m);

those sunken slabs located partly on the structural slab of that floor or its immediate upper floor.

備註：

1. 樓面平面圖所列數字為以毫米標示之建築結構尺寸，並以四捨五入至整數。

2. 樓面平面圖中顯示之名詞及簡稱之圖例，請參閱本售樓說明書第48頁。

3. 層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）包括但不限於：

（ # ）當中在該樓層跌級樓板為0.075米的跌級高度；

（ ⊕ ）當中在該樓層跌級樓板為0.250米的跌級高度；


（ ☆ ）當中在該樓層跌級樓板為0.300米的跌級高度；

（ △ ）當中在該樓層跌級樓板為0.350米的跌級高度；

該等跌級樓板有部分位於該樓層或上一層之石屎地台面。

Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

30/F
30樓

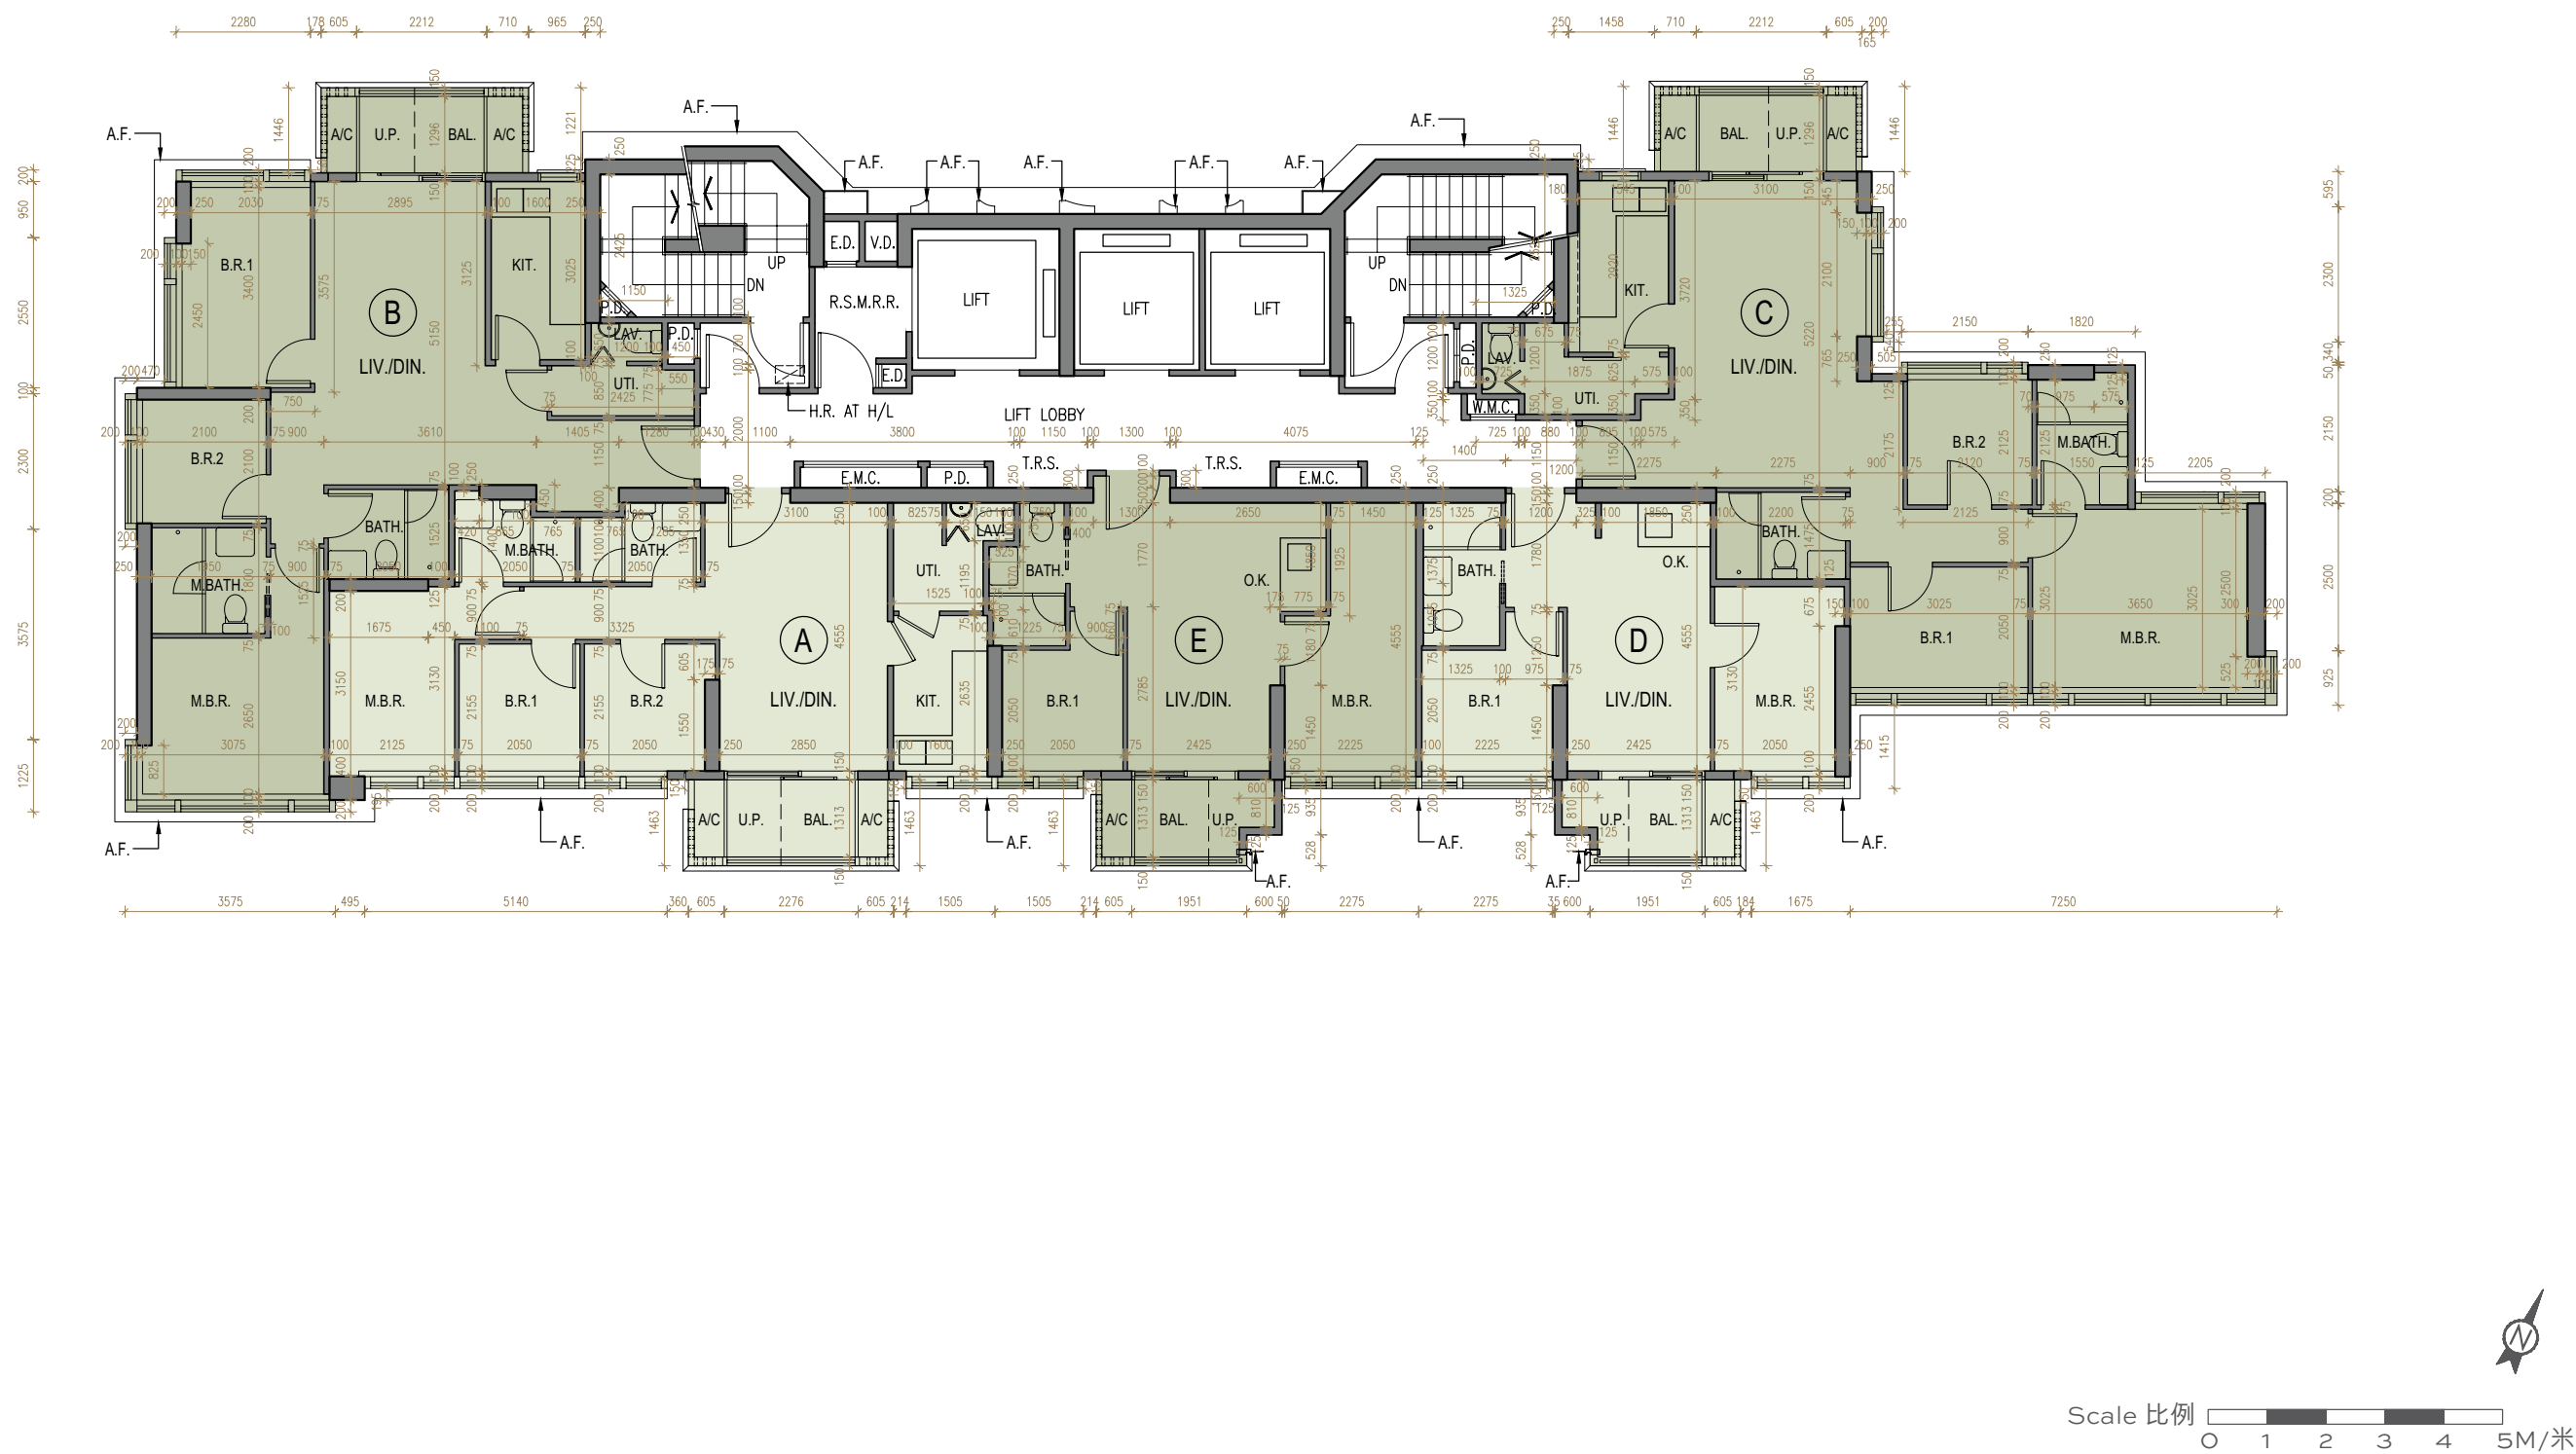

Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

31/F
31樓

Description 描述	Flat 單位	
	A	B
Floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (m) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層石屎地台面之高度距離)(米)	3.050 3.100 3.375 3.400 △ 3.450 3.450 △ 3.525 # 3.700 ⊕ 3.800 △ 3.850 □	3.050 3.100 3.175 # 3.200 3.375 3.450 3.450 # 3.450 △ 3.500 □ 3.700 ⊕ 3.725 # 3.800 △ 3.850 □
Thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板(不包括灰泥)厚度(毫米)	150 175 200	

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。

Remarks:

1. The dimensions in the floor plans are all structural dimensions in millimetre and rounded off to the nearest integer.

2. Please refer to Page 48 of this sales brochure for legend of the terms and abbreviations shown in the floor plans.

3. The floor-to-floor height (i.e. the height between the top surface of the structural slab of that floor and the top surface of the structured slab of its immediate upper floor) includes, without limitation:

(#) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.075m);

(⊕) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.250m);

(△) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.350m);

(□) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.400m);

those sunken slabs located partly on the structural slab of that floor or its immediate upper floor.

備註：

1. 樓面平面圖所列數字為以毫米標示之建築結構尺寸，並以四捨五入至整數。

2. 樓面平面圖中顯示之名詞及簡稱之圖例，請參閱本售樓說明書第48頁。

3. 層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）包括但不限於：

（#）當中在該樓層跌級樓板為0.075米的跌級高度；

（⊕）當中在該樓層跌級樓板為0.250米的跌級高度；


（△）當中在該樓層跌級樓板為0.350米的跌級高度；

（□）當中在該樓層跌級樓板為0.400米的跌級高度；

該等跌級樓板有部分位於該樓層或上一層之石屎地台面。

Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

31/F
31樓

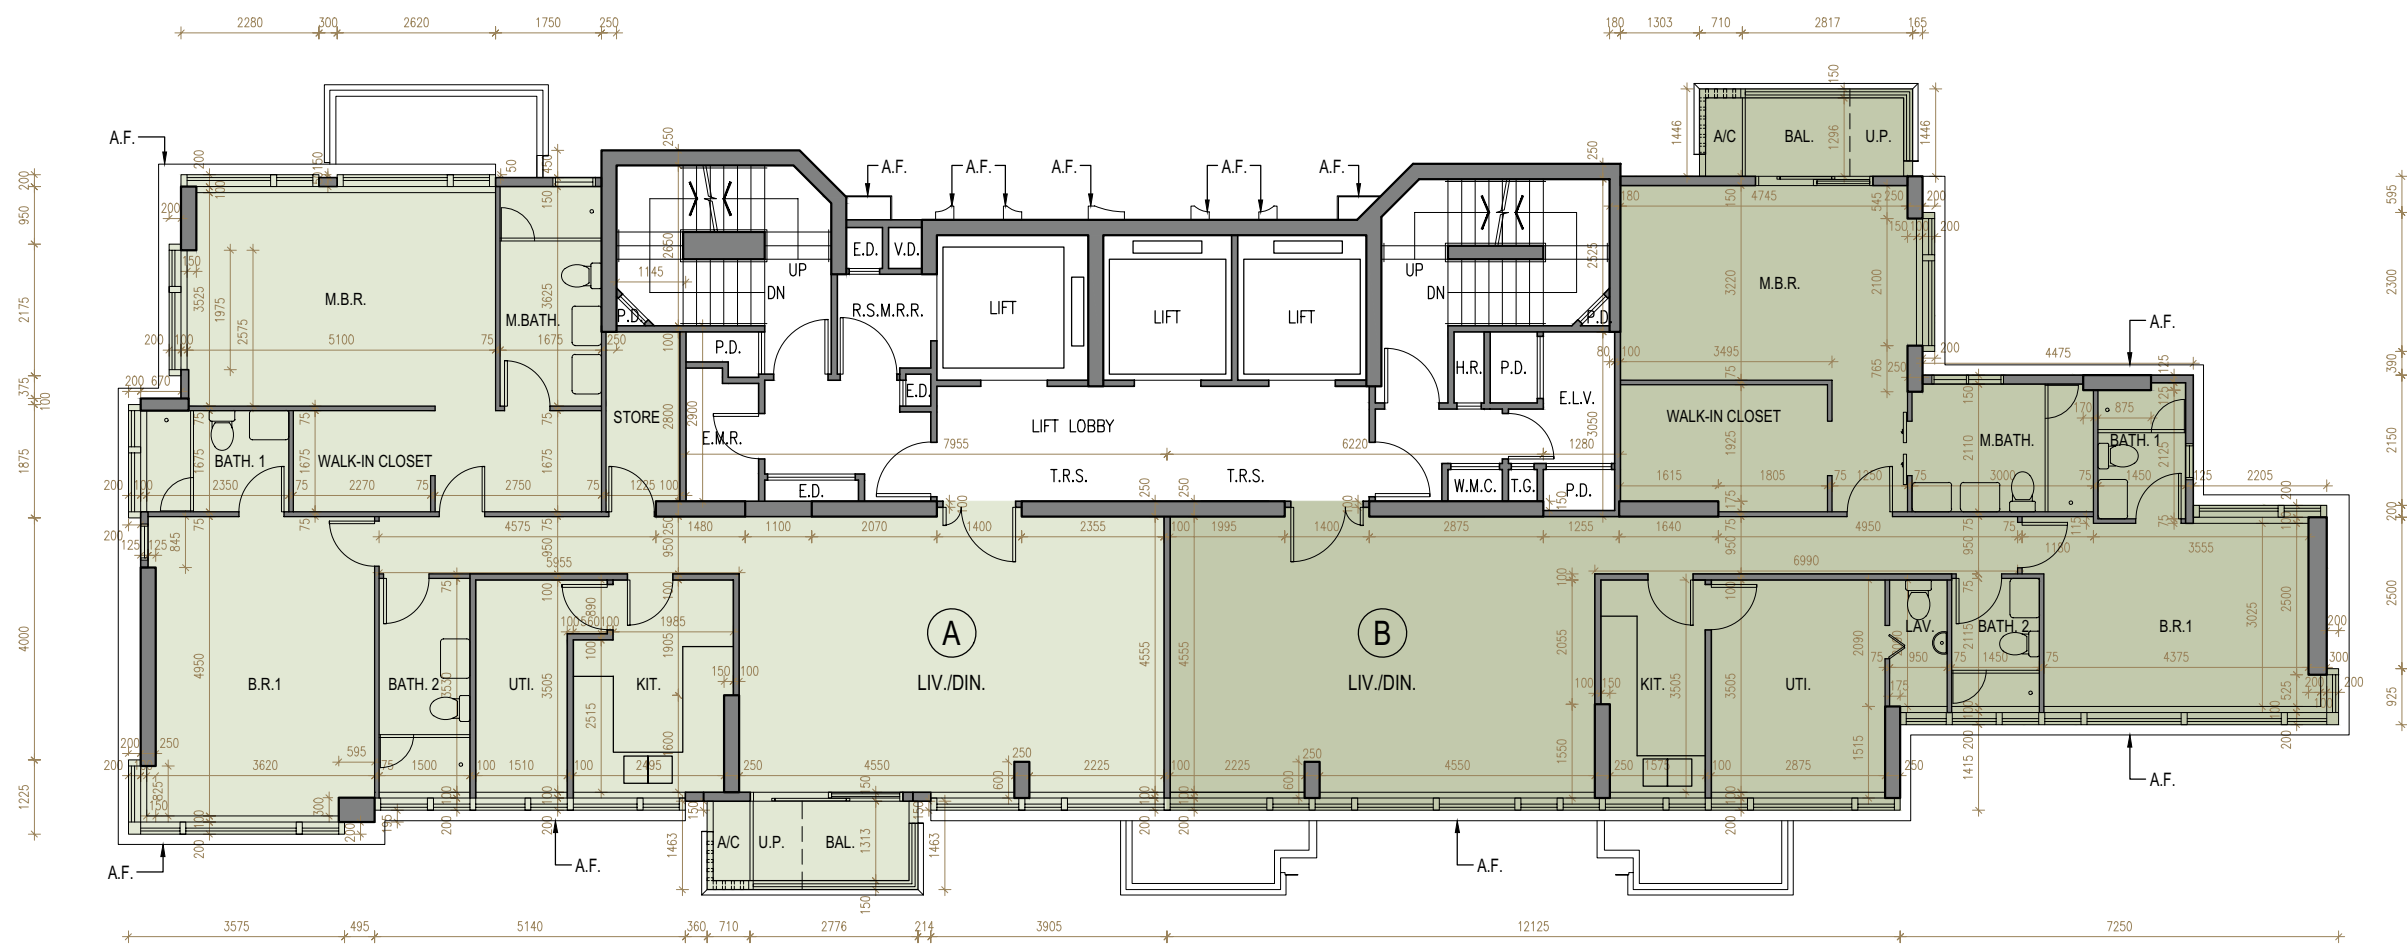

Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

32/F
32樓

Description 描述	Flat 單位		
	A	B	C
Floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (m) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層石屎地台面之高度距離) (米)	3.450 3.525 # 3.800 △ 3.850 3.850 □ 4.200 △ ^	3.450 3.525 # 3.700 ⊕ 3.800 △ 3.850 3.850 ^ 4.200 △ 4.200 △ ^	3.450 3.800 △ 3.850 ^ 3.925 # ^ 4.100 ⊕ ^ 4.200 △ ^ 4.250 □ ^
Thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 厚度 (毫米)	200		

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。

Remarks:

1. The dimensions in the floor plans are all structural dimensions in millimetre and rounded off to the nearest integer.

2. Please refer to Page 48 of this sales brochure for legend of the terms and abbreviations shown in the floor plans.

3. The floor-to-floor height (i.e. the height between the top surface of the structural slab of that floor and the top surface of the structured slab of its immediate upper floor) includes, without limitation:

(#) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.075m);

(⊕) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.250m);

(△) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.350m);

(□) Inclusive of the sunken depth of the sunken slab on the floor of that floor (0.400m);

(^) Inclusive of the thickness of the mass fill concrete layer on the floor of the floor above (0.400m);

those sunken slabs located partly on the structural slab of that floor or its immediate upper floor.

備註：

1. 樓面平面圖所列數字為以毫米標示之建築結構尺寸，並以四捨五入至整數。

2. 樓面平面圖中顯示之名詞及簡稱之圖例，請參閱本售樓說明書第48頁。

3. 層與層之間的高度（指該樓層之石屎地台面與上一層石屎地台面之高度距離）包括但不限於：

（#）當中在該樓層跌級樓板為0.075米的跌級高度；

（⊕）當中在該樓層跌級樓板為0.250米的跌級高度；

（△）當中在該樓層跌級樓板為0.350米的跌級高度；


（□）當中在該樓層跌級樓板為0.400米的跌級高度；

（^）包含上層地台混凝土填充層厚度（0.400米）；

該等跌級樓板有部分位於該樓層或上一層之石屎地台面。

Floor plans of residential properties in the development
發展項目的住宅物業的樓面平面圖

32/F
32樓

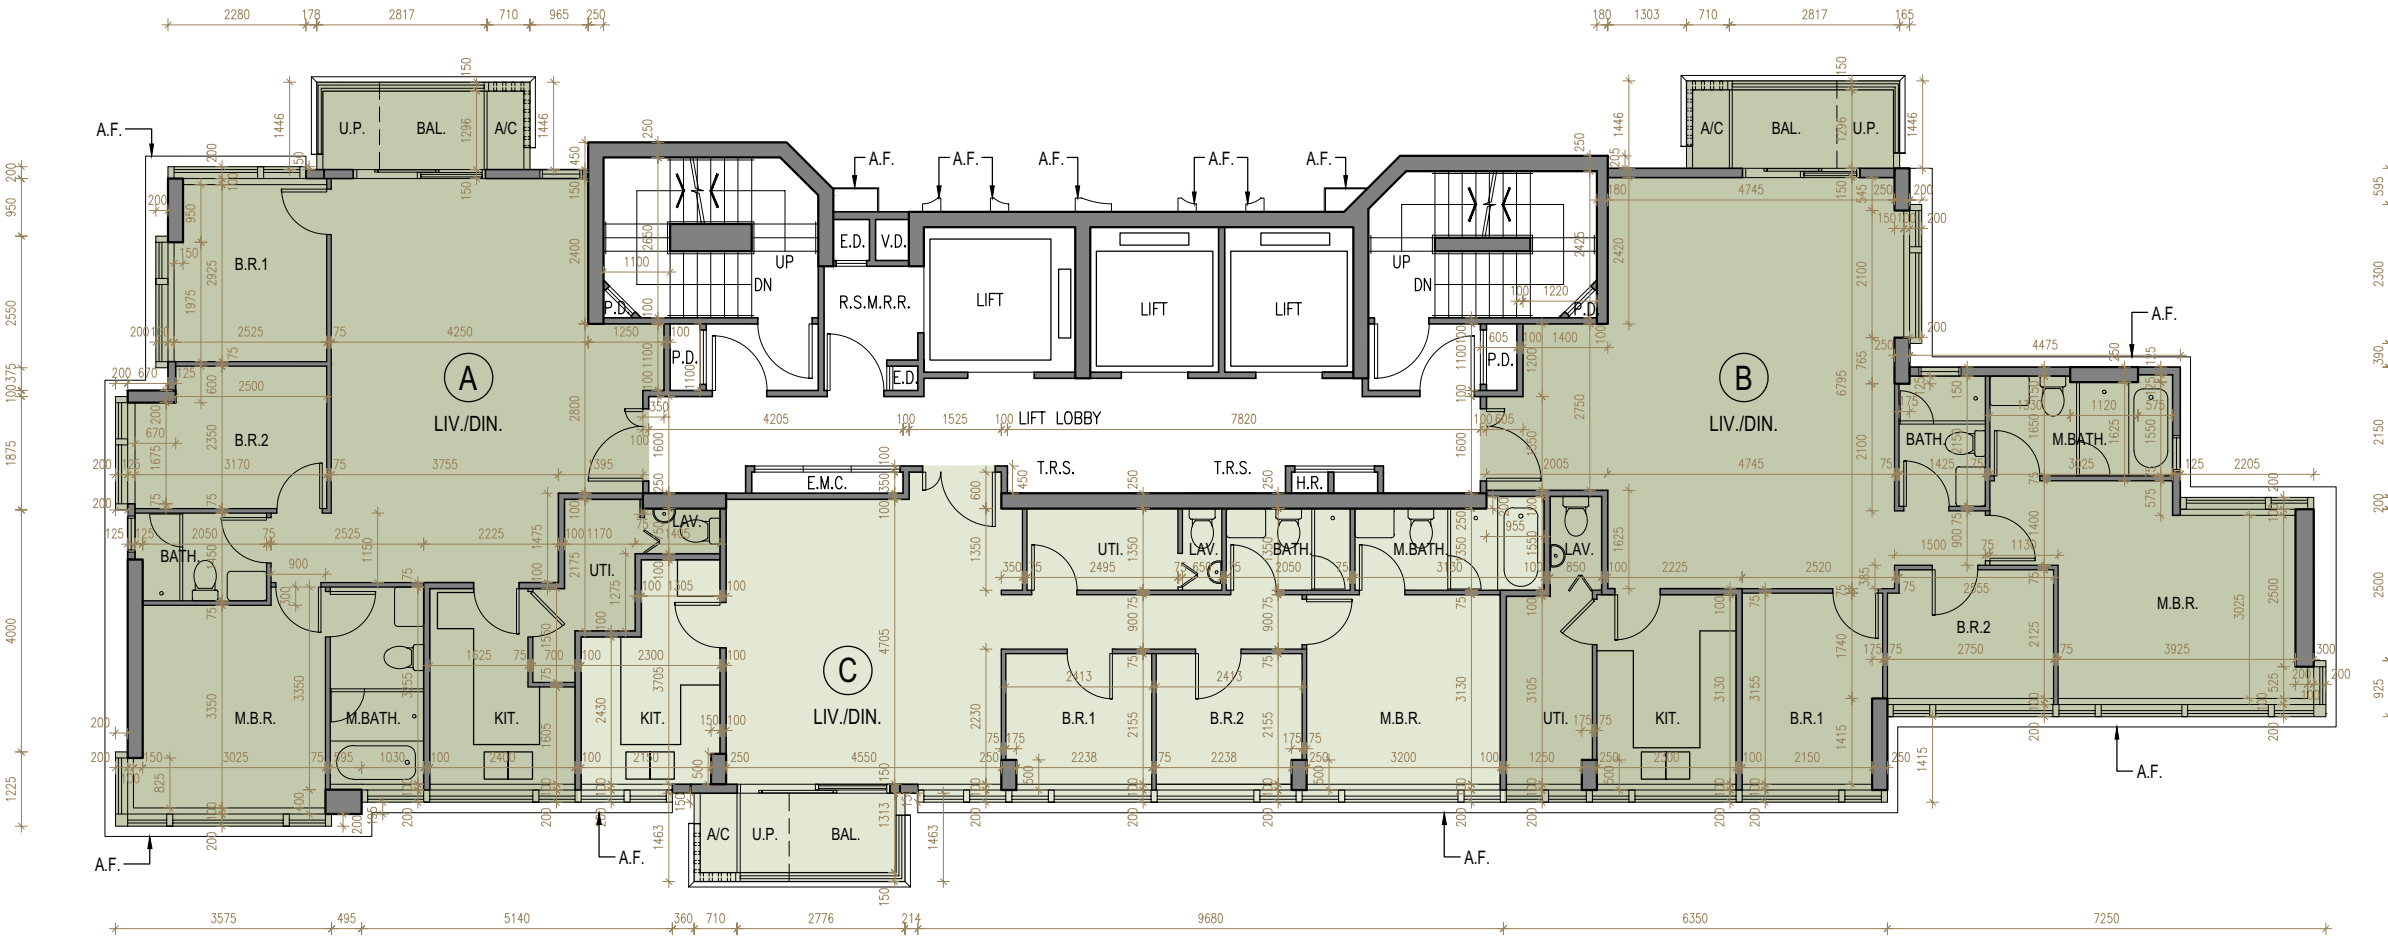

Floor plans of residential properties in the development

發展項目的住宅物業的樓面平面圖

Roof 天台

Description 描述	Flat 單位		
	A	B	C
Floor-to-floor height (refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor) of each residential property (m) 每個住宅物業的層與層之間的高度 (指該樓層之石屎地台面與上一層石屎地台面之高度距離) (米)	Not Applicable 不適用		
Thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 厚度 (毫米)	Not Applicable 不適用		

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。

- Remarks:
- 1. The dimensions in the floor plans are all structural dimensions in millimetre and rounded off to the nearest integer.
 - 2. Please refer to Page 48 of this sales brochure for legend of the terms and abbreviations shown in the floor plans.

- 備註：
- 1. 樓面平面圖所列數字為以毫米標示之建築結構尺寸，並以四捨五入至整數。
 - 2. 樓面平面圖中顯示之名詞及簡稱之圖例，請參閱本售樓說明書第 48 頁。

